
AUTOMOTIVE APPLICATION PROFILE

Lithium Ion Battery Frame and Cage

We understand that in the automotive industry, you need reliable materials that perform to a higher standard. Ascend offers a comprehensive portfolio of engineered plastics for challenging automotive applications. We work with our customers to achieve the very best from our products. That's why we offer a worldwide support network of application specialists and technical experts. Our material knowledge and expertise in automotive systems can help you improve part performance and reduce material usage and cycle times.

Products Used: R530H NT, R533H NT, R535H NT

Application Description


Lithium ion (Li-ion) batteries are made of many individual battery cells grouped together in modules. The modules are enclosed in a structure to provide support, stiffness, electrical insulation and chemical resistance to the entire module structure. These can be comprised of metallic or polymeric materials. Polymeric structures are preferred because of their light weight. Some mounts, depending on design, are attached to the battery cage via adhesives or bolted on.

Given its exceptional temperature resistance, battery frames made with Vydyne® glass-filled PA66 provide support to the Li-ion cells over a wide range of temperatures (-30°C to 85°C). PA66 strength, stiffness

and dimensional stability at elevated temperatures are critical to performance. Furthermore, its electrical insulating and chemical resistance properties help ensure batteries continue to operate safely over their lifespan.

Benefits

- Stiffness and strength
- Electrical insulation
- Dimensional stability
- Chemical resistance

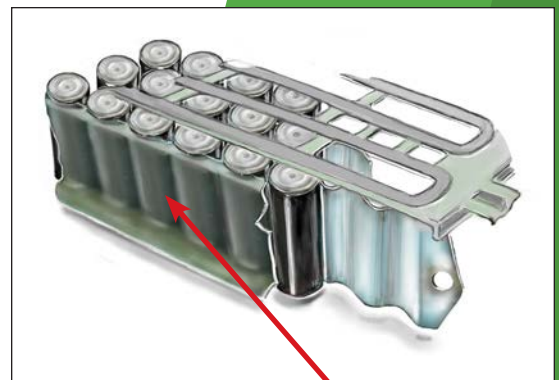

Battery frame supporting Li-ion cells

The Vydne Difference

Ascend's Vydne R533H, R535H, R535H family of glass-filled products are ideal for battery frames and cages. They possess a combination of high strength, stiffness and Heat Deflection Temperature (HDT) to support the battery cells at elevated temperature and protect them during vehicle crashes. The inherent electrical

insulating properties of PA66 make it the perfect fit for electric vehicle (EV) battery module frames and cages. All grades exhibit high flow that helps reduce warpage during molding and frequently provide faster cycle times versus the competition. Outstanding PA66 chemical resistance is characteristic of these grades.

Product Properties

R530H NT, R533H NT, R535H NT					
Property*	Test Method	Units	R530H NT	R533H NT	R535H NT
Specific Gravity	ISO 1183	none	1.37	1.40	1.41
Tensile Strength	ISO 527-2	MPa	195	205	209
Flexural Modulus	ISO 178	MPa	9,600	10,200	10,500
Notched Charpy Impact at 23°C	ISO 179	kJ/m ²	12	12	12
DTUL @ 1.8 MPa	ISO 75-2/A	°C	250	250	250
Dielectric Strength	IEC 60112	kV/mm	20	20	20
Volume Resistivity	IEC 60093	ohms-cm	1.0 E+13	1.0 E+13	1.0 E+13

*Dry as molded (DAM)



Ascend Performance Materials is the world's largest fully integrated producer of nylon 6,6 resin. We manufacture and reliably supply world-class plastics, fibers and chemicals that are used in thousands of everyday applications such as car parts, electronics and cable ties.

North America

1010 Travis Street
Suite 900
Houston, TX 77002
United States
+1 713 315 5700

Europe

Watson & Crick Hill Park
Rue Granbonpré 11 – Bâtiment H
B-1435 Mont-Saint-Guibert
Belgium
+32 10 608 600

Asia

Unit 3602,
Raffles City Office Towers
268 Xi Zang Road (M)
Shanghai 200001
China
+86 21 2315 0888

© 2018 Ascend Performance Materials Operations LLC. The Ascend Performance Materials and Vydne marks and logos are trademarks or registered trademarks of Ascend Performance Materials Operations LLC.

Although the information and recommendations set forth herein (hereinafter "Information") are presented in good faith and believed to be correct as of the date hereof, Ascend Performance Materials Operations LLC makes no representations or warranties as to the completeness or accuracy thereof. The full disclaimer of warranty and liability can be found at ascendmaterials.com/disclaimer. Rev. 09/2018 AAP053



inspiring everyday